

# UNIX講習

## UNIXシステムとコマンドの紹介

大阪大学 大学院基礎工学研究科

物質創成専攻 未来物質領域

草部 浩一

# An instruction on X window (ubuntu machine)

- We use machines operated by a Linux system .
- Each user is identified by “user id” & “password”.
- Your terminal might start by pushing the monitor button (📺) .

User id is 'cmd'.



You need password 'c.m.dworkshop' to login a terminal machine.

Another password 'cmdworkshop' might work to launch your machine.

You have a good '日本語' environment, if you start by choosing it.


# ubuntu : the spirit of Ubuntu to the world of computers



You see the “terminal” icon. Click it.




# Selection of the terminal

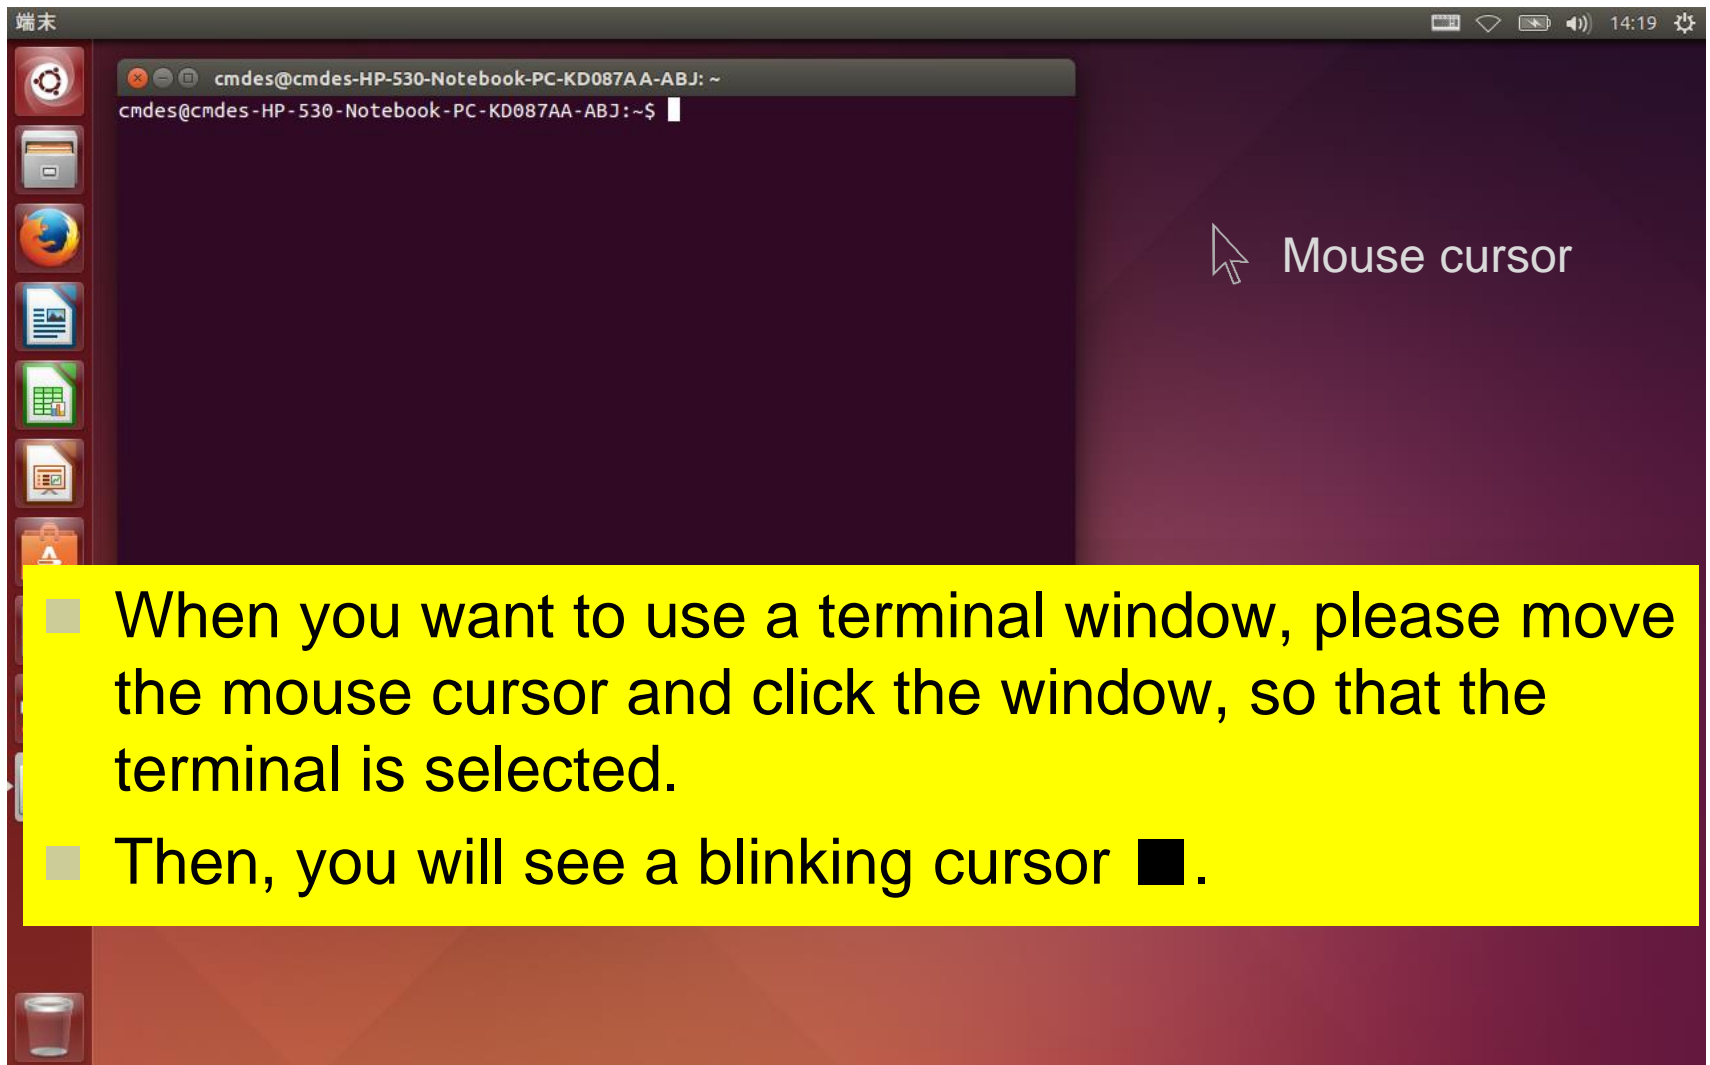
A screenshot of a Linux desktop environment. The desktop background is a dark purple gradient. On the left side, there is a vertical dock with several application icons: a red circular icon with a white gear, a white folder icon, a blue and orange globe icon, a blue document icon, a green spreadsheet icon, a white document icon, and a white trash can icon. At the top left, the text '端末' (Terminal) is visible. At the top right, there are system status icons for network, battery, and volume, along with the time '14:19' and a settings gear icon. A terminal window is open in the center-left, with a title bar that reads 'cmdes@cmdes-HP-530-Notebook-PC-KD087AA-ABJ: ~'. The terminal content shows 'cmdes@cmdes-HP-530-Notebook-PC-KD087AA-ABJ:~\$' followed by a white cursor. A white mouse cursor is positioned over the terminal window, and the text 'Mouse cursor' is written next to it. A yellow text box is overlaid on the bottom half of the screenshot, containing two bullet points.

■ When you want to use a terminal window, please move the mouse cursor and click the window, so that the terminal is selected.

■ Then, you will see a blinking cursor ■.

# Type “ls” to see your home directory.

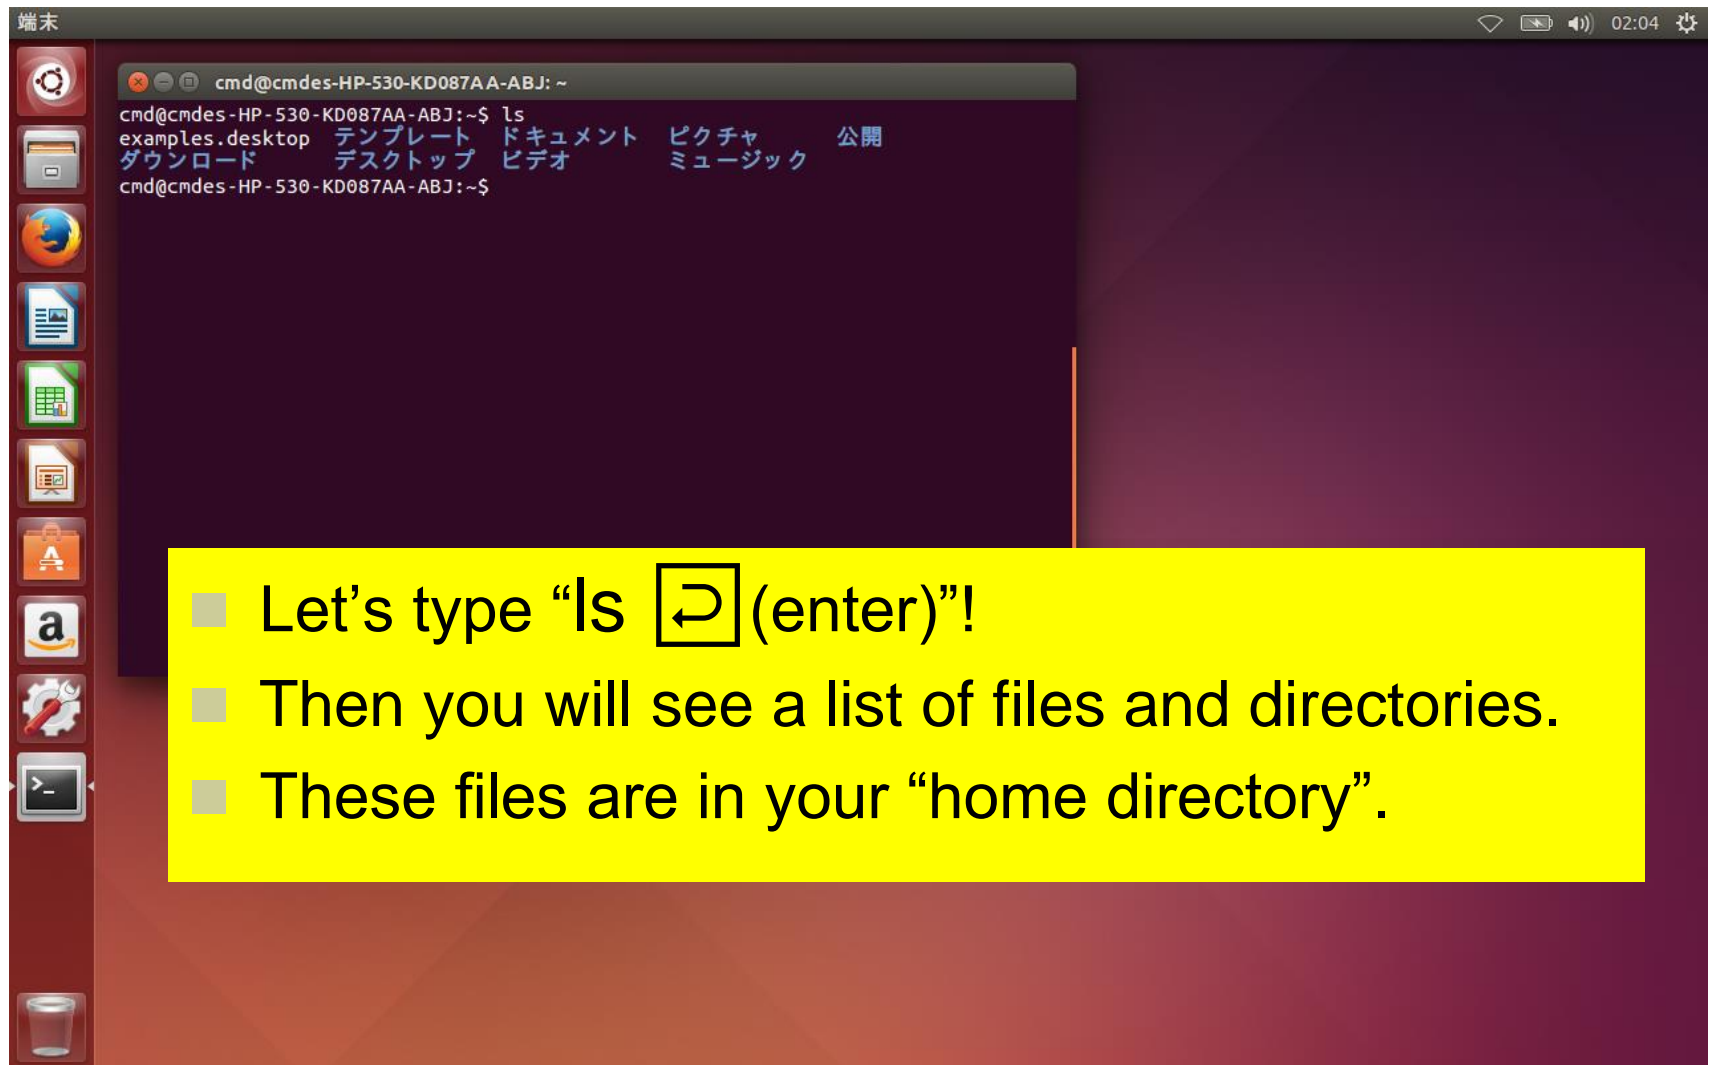


- Let's type "ls  (enter)"!
- Then you will see a list of files and directories.
- These files are in your "home directory".

# To start “Log out” or “Shutdown”


- Type an icon of the system setting in the title bar. You will see a pull down menu.
- You could have a little different style.
- But, it is not so difficult to find a solution solving your demands, once you get “your style”.



# Login : you start connection to the system!

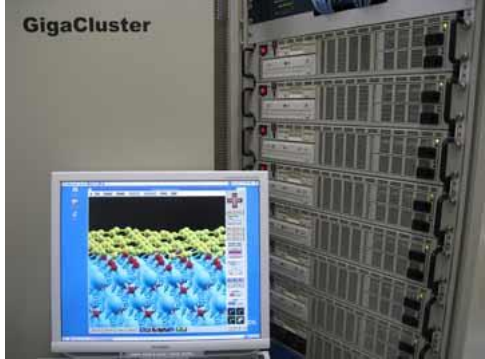


Bob → Unix on a PC      A user in a Unix system → Another Unix system

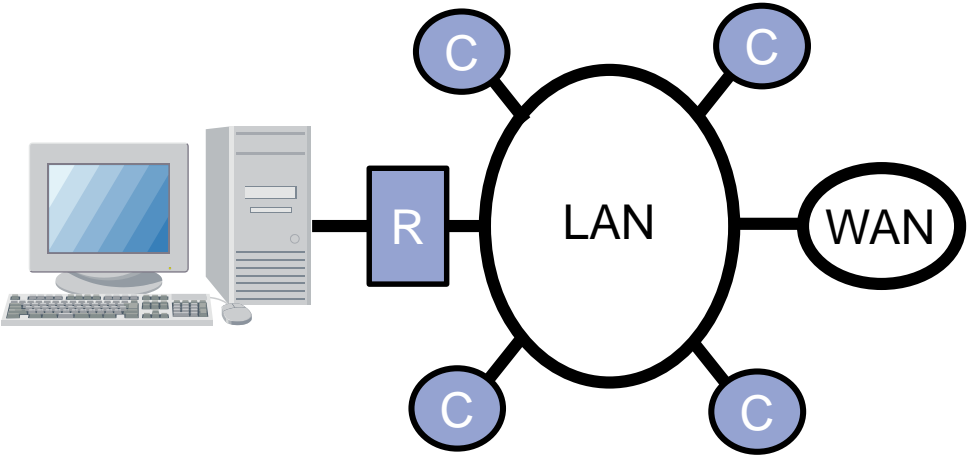

A user → Internet

Always you would see,

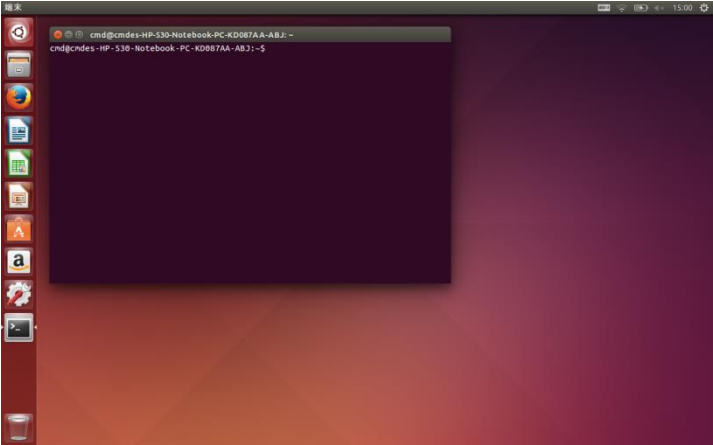




# SSH : Secure Shell


A cryptographical network protocol

This is “a protocol for secure data communication” between two networked computers. It allows us

- To connect your terminal PC to another computer,
- To “**login**” in a secure manner,
- To execute “remote commands”.

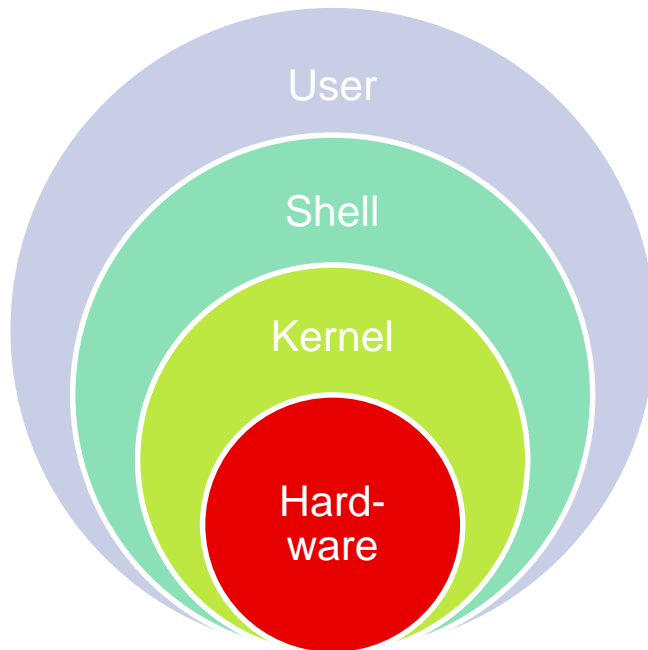


**ssh**

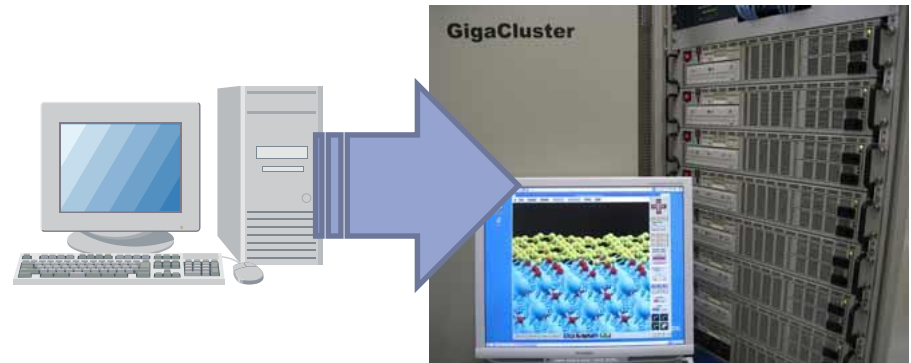


Using “ssh” in the next page, you can control a remote host as if you are using it in front of you. This action is done in a secured manner!

# When your machine is connected to the net,

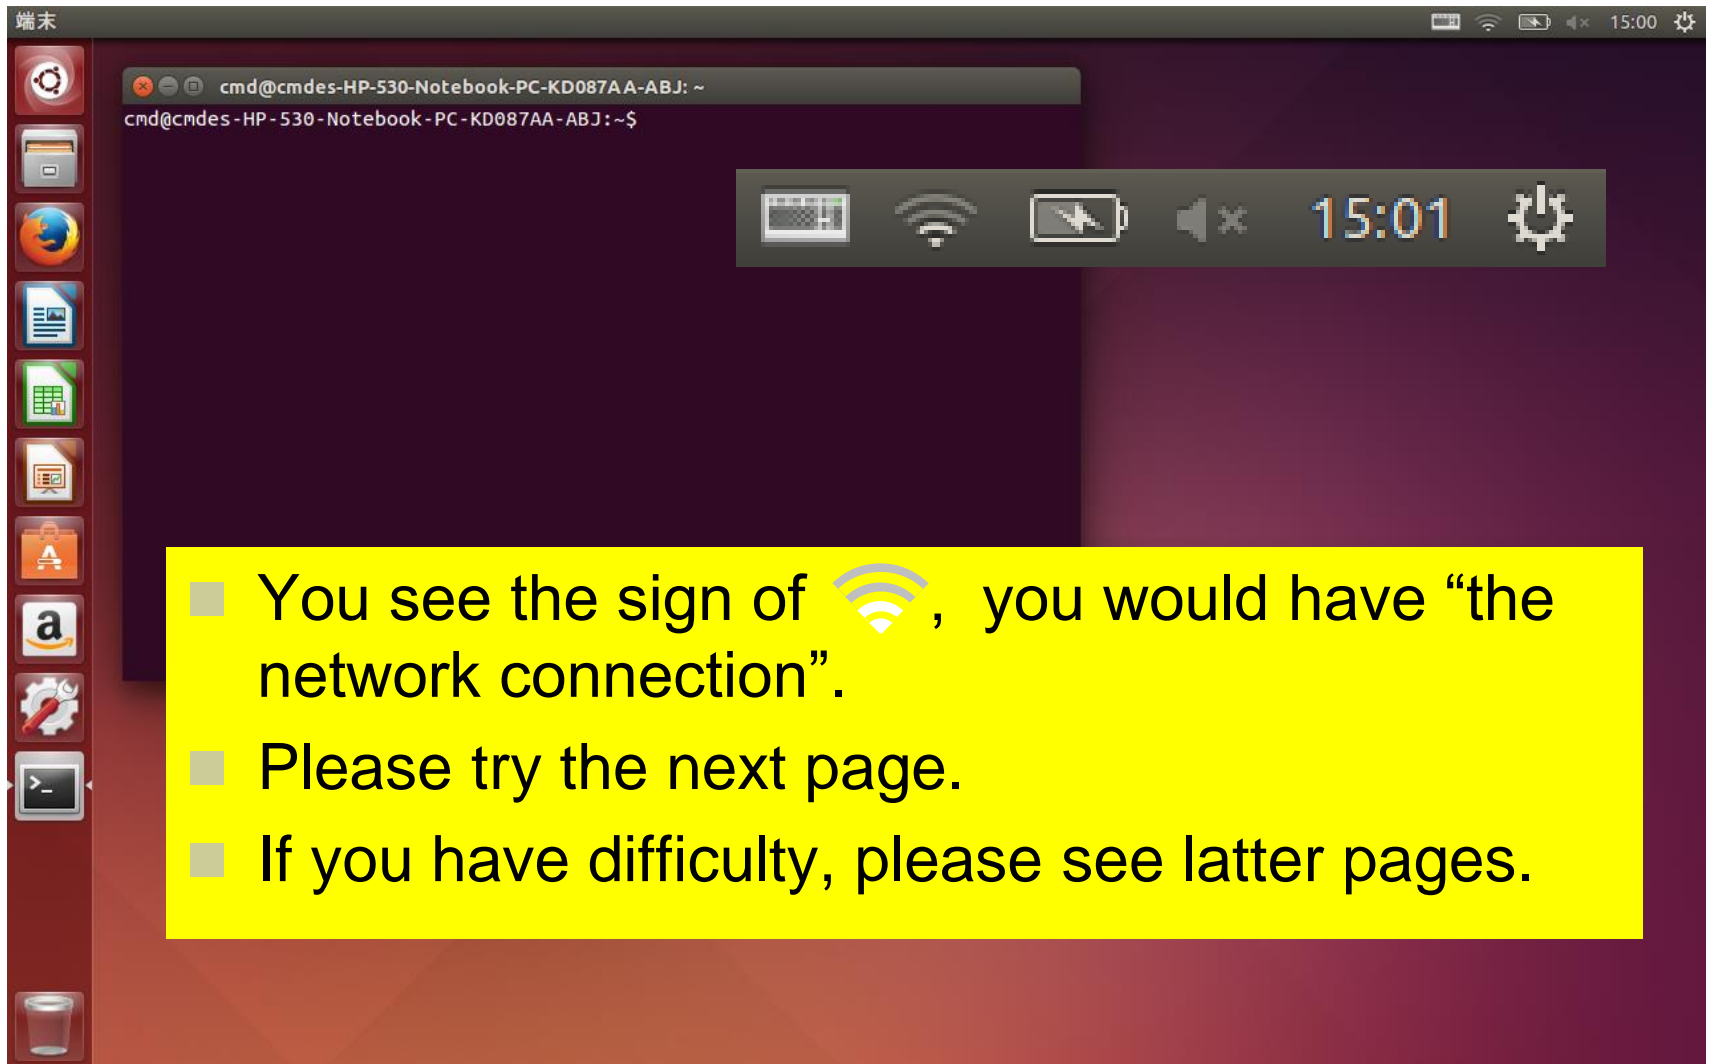

The image shows a Linux desktop environment. At the top, a terminal window is open with the prompt `cmd@cmdes-HP-530-Notebook-PC-KD087AA-ABJ: ~` and the command `cmd@cmdes-HP-530-Notebook-PC-KD087AA-ABJ:~$`. The desktop background is dark purple. On the left side, there is a vertical dock with several application icons. At the bottom right, there is a system tray containing icons for a keyboard, Wi-Fi, battery, speaker, the time 15:01, and a settings gear.

- You see the sign of , you would have “the network connection”.
- Please try the next page.
- If you have difficulty, please see latter pages.

# Let's login "cmd" !

- Find your "user id": stud\*\* (ex. stud07)
- On a terminal, use "ssh" to log in **cmd2** in OU.
  - `$ ssh -Y -l stud** cmd2.phys.sci.osaka-u.ac.jp` ↩
  - `$ ssh stud**@ cmd2.phys.sci.osaka-u.ac.jp` ↩
    - Your passphrase is "**cmdstud\*\***".  
(("\*\*" is same as the two digits in your id of "stud\*\*".)
    - The typed passphrase is not shown on the screen.
    - For the second time, no request for passphrase.
- "ssh" is a unix command:
  - `$ ssh -Y -l "user id" "machine address"`

# Two methods for ‘authentication’

## RSA public key auth.

- Double key authentication
- Security level : high

Appearance

Change id (stud\*\*) !

```
[teac01@rl ~]$ ssh -Y -I teac01 cmd2
```

Enter passphrase for key

```
‘/home/CMD/teac01/.ssh/id_rsa’:
```

The passphrase will **not**  
echo back (not seen).

Appearance

```
[teac01@cmd2 ~]$ ssh -Y -I teac01 rl
```

Enter passphrase for key

```
‘/home/CMD/teac01/.ssh/id_rsa’:
```

The passphrase will **not**  
echo back (not seen).

Note: the directory shown is “on the local machine to connect the remote machine”.

# RSA & DSA, in a nutshell

RSA was invented by Ron Rivest, Adi Shamir, and Leonard Adleman in 1977. Nowadays, a key length of 4096 bits is used with  
\$ ssh-keygen -t RSA -b 4096

DSA (Digital Signature Algorithm) provided by NIST in 1991.  
\$ ssh-keygen -t DSA

An example of the usage of 'ssh-keygen' :

```
$ ssh-keygen
```

Enter file in which to save the key (/home/CMD/teac01/.ssh/id\_rsa) :

Enter passphrase (empty for no passphrase) :

Enter same passphrase again :



The public key in id\_rsa.pub on the client-host should be saved (added) in  
.ssh/authorized\_keys  
in the server-host.

# You might have lost connection.

```
cmd@cmdes-HP-530-Notebook-PC-KD087AA-ABJ: ~  
cmd@cmdes-HP-530-Notebook-PC-KD087AA-ABJ:~$ ssh teac01 cmd2.phys.sci.osaka-u.ac.  
jp  
ssh: Could not resolve hostname teac01: Name or service not known  
cmd@cmdes-HP-530-Notebook-PC-KD087AA-ABJ:~$
```



You need to change this sign,  
and have the connection.

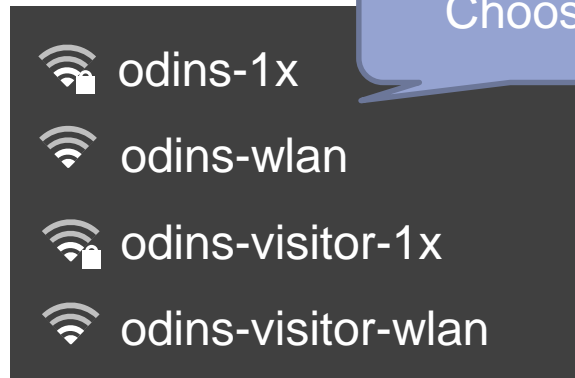

# For odins-wlan or odins-visitor-wlan

You need to open “Firefox” by pushing



. Then you might be asked to input

your ID and Password for “ODINS”.  
For user having “大阪大学個人ID”,  
choose “odins-wlan”.

For user having “ビジターID”,  
choose “odins-visitor-wlan”.

## ODINS wireless LAN service

### LOGIN

※入力項目には「大阪大学個人ID (Personal ID)とパスワード(Password)」をご入力下さい。

User

Password


### INFORMATION

現在、お知らせはありません。

### MANUALS

各種マニュアル一覧(ログイン前でも閲覧可能)  
下記に掲載しているSSID: odins-1xの方が、より安全に利用可能です。

一覧(pdfファイル)	掲載内容
Using the odins-wlan (this authentication page)	本ログインページの利用マニュアル (各種OS、ブラウザ共通)
For Windows XP user	よりセキュリティが高い“SSID: odins-1x”の利用マニュアル。(以下OS毎のマニュアル)

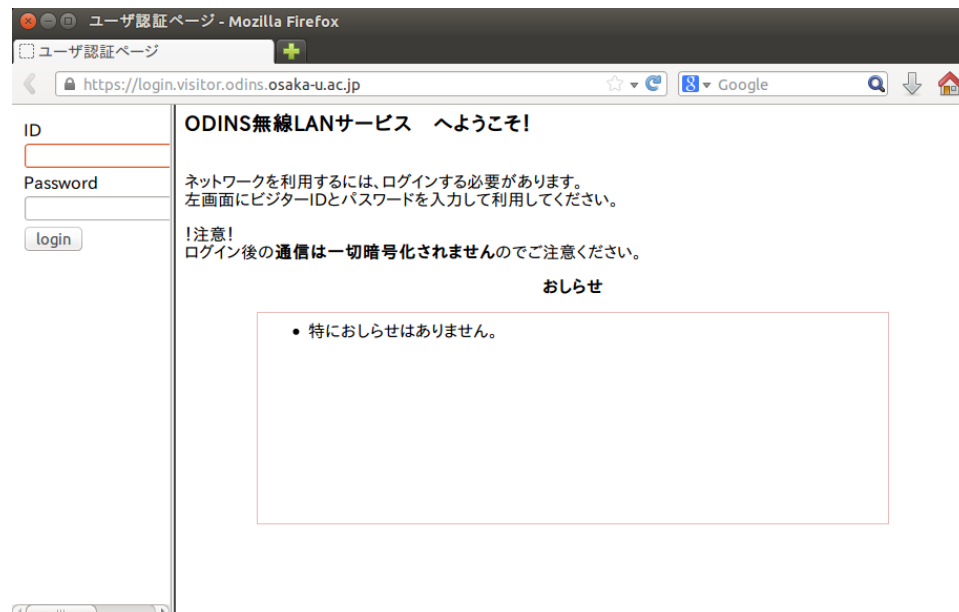

ユーザー認証ページ - Mozilla Firefox

ユーザー認証ページ

https://login.visitor.odins.osaka-u.ac.jp

ID

Password

ODINS無線LANサービス へようこそ!

ネットワークを利用するには、ログインする必要があります。  
左画面にビジターIDとパスワードを入力して利用してください。


!注意!  
ログイン後の通信は一切暗号化されませんのでご注意ください。

お知らせ

- 特にお知らせはありません。

The above images for the login windows might be renewed.

# When the connection is successful,

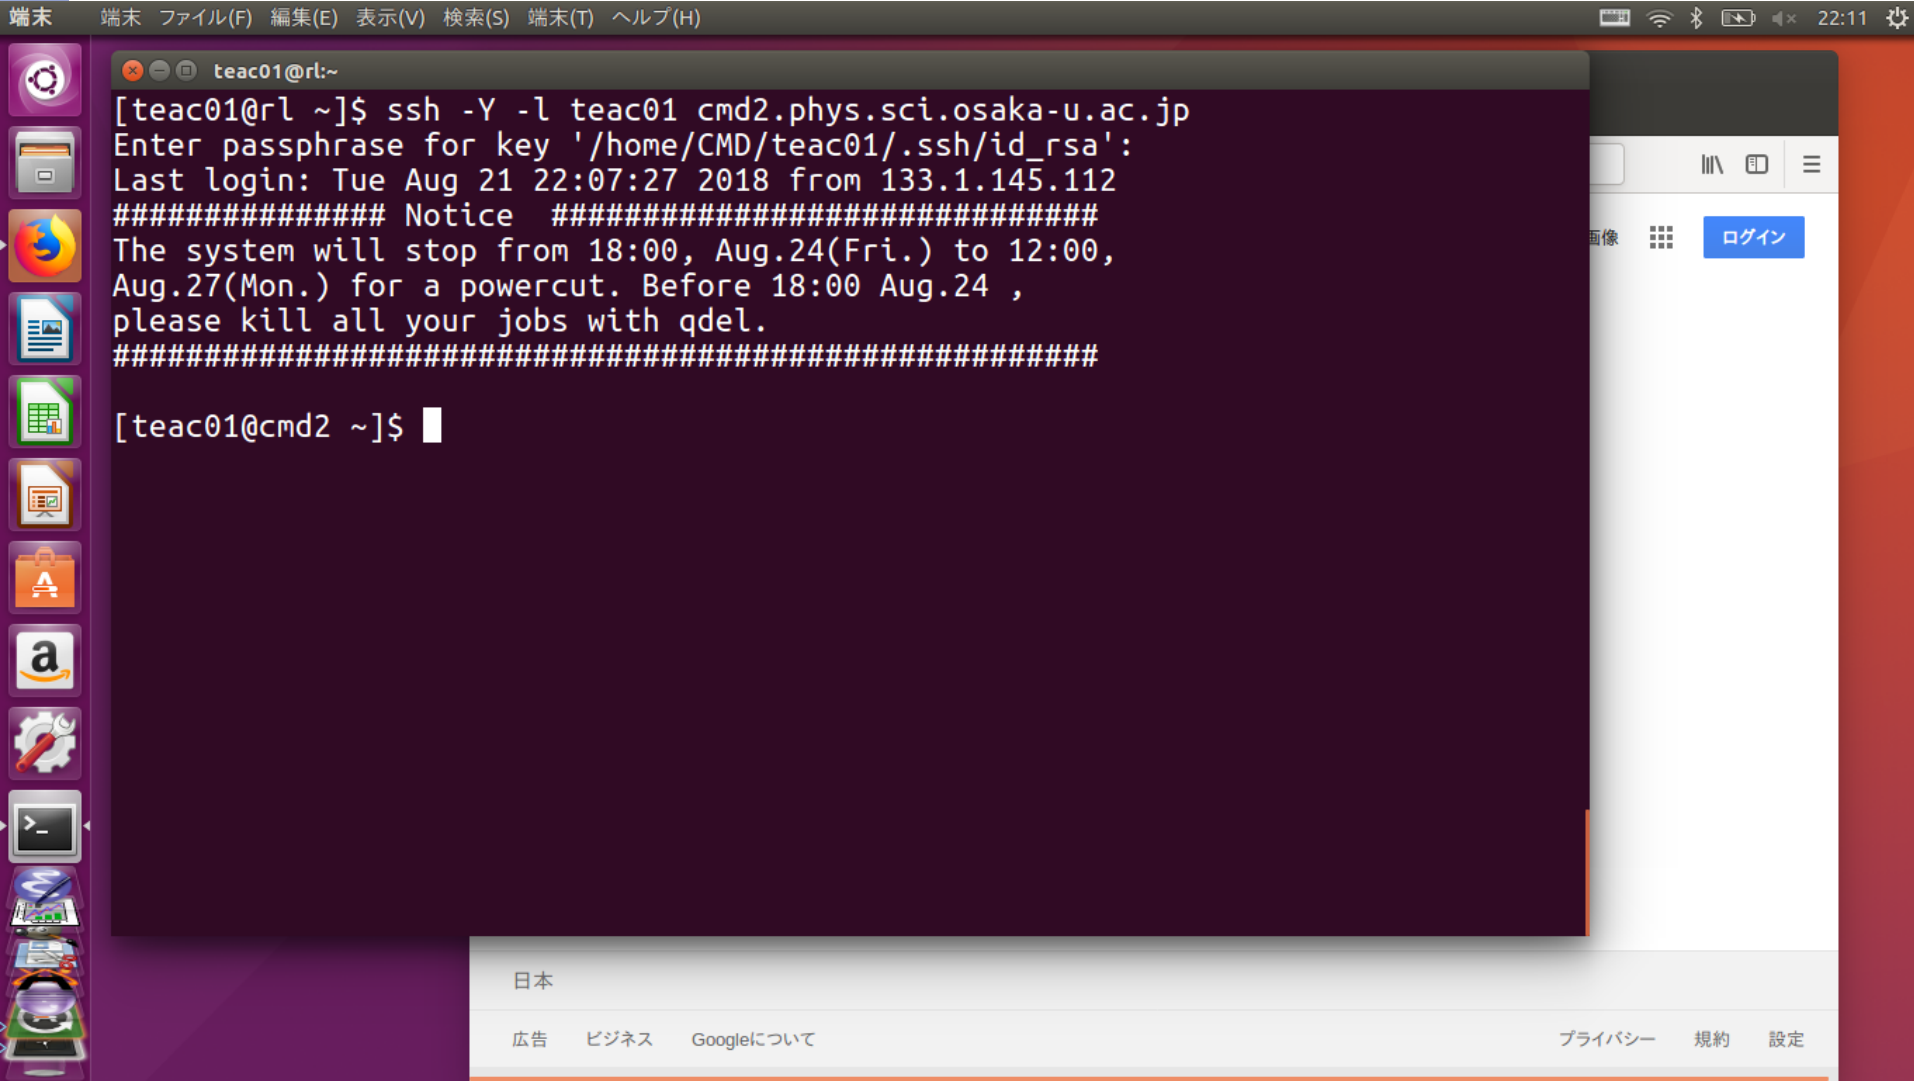

端末 ファイル(F) 編集(E) 表示(V) 検索(S) 端末(T) ヘルプ(H) 22:11

```
teac01@rl:~  
[teac01@rl ~]$ ssh -Y -l teac01 cmd2.phys.sci.osaka-u.ac.jp  
Enter passphrase for key '/home/CMD/teac01/.ssh/id_rsa':  
Last login: Tue Aug 21 22:07:27 2018 from 133.1.145.112  
##### Notice #####  
The system will stop from 18:00, Aug.24(Fri.) to 12:00,  
Aug.27(Mon.) for a powercut. Before 18:00 Aug.24 ,  
please kill all your jobs with qdel.  
#####  
[teac01@cmd2 ~]$
```

日本  
広告 ビジネス Googleについて プライバシー 規約 設定




# Command minimum

- Typing a UNIX Command
- Login
- cp : copy a file
- Unpack : tar
- Edit a file : emacs
- make : create an application
- Run
- Logout

# Key typing for explanation

This is a character automatically shown by the computer, which is called “a prompt”. The character (or a set of words) depends on the setting of the machine.

Finally, you need to type the return key.

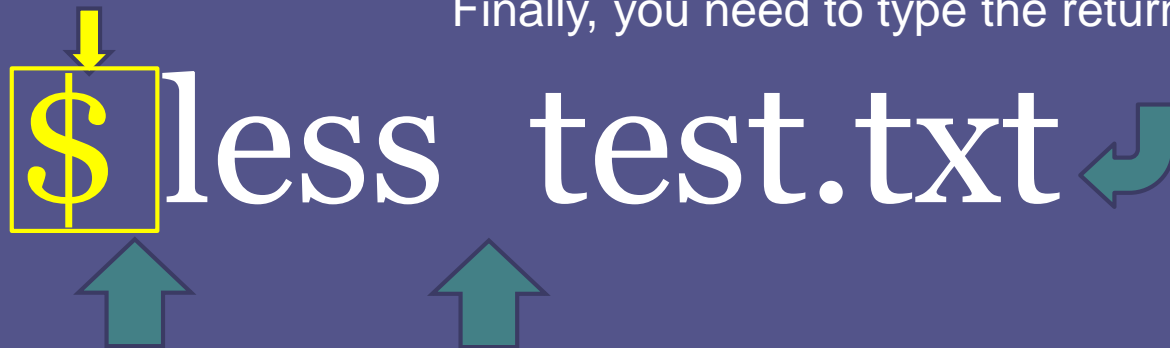A diagram illustrating a terminal prompt. The prompt character '\$' is enclosed in a yellow square box, with a yellow arrow pointing down to it. To the right of the box is the text 'less test.txt'. A teal arrow points up to the space between '\$' and 'less'. Another teal arrow points up to the space between 'less' and 'test.txt'. A teal arrow with a downward-pointing hook points to the end of the text 'test.txt', representing the return key.

There is a space. Type the space key (The long key).

In this case, you may type letters starting from 'l'.

Caution: type “q”, when you want to stop, end, or quit less.

At first, please type

```
$ cp /home/CMD/teaco1/ex.tar .
```

Space !

Space !

Next, please type

```
$ tar xvf ex.tar  
$ cd ex
```

To execute a command, type

```
$ less test.txt
```

Caution: type “q”, when you want to stop, end, or quit less.

This action may be explained as,

Purpose : to see test.txt.

目的 : test.txtの中を見る.

```
$ less test.txt
```

# A short manual of “less”

- Move
  - “f” : move forward.
  - “b” : move backward.
- Search
  - “/ [pattern]” : search the pattern.
  - “n” : search again
- Others
  - “q” : quit. (same as :q, :Q, or ZZ.)
  - “r” : refresh the screen.
  - “h” : help.

To compile a program,

\$ make



To run the program,

```
$ ./diag
```

Further, you can use,

```
$ emacs diag.f90 -nw
```

```
$ cd ..
```

```
$ ls -laF
```


Please see the following pages and “[計算機\(UNIX\)使用法](#)”.

# The terminal does hung-up. You can do it.

- No character appears for your keystroke, then
  - Type `Ctrl + q`. Or `Ctrl + s` may restart the input, when the scroll is stopped.
- No prompt (flushing cursor at `/home/x60***>`) appears. Then, you can try one of these.
  - `Ctrl + d` (When you call `cat` without arguments.)
  - `Ctrl + c` (When a command does not stop.)
  - `Ctrl + z` Then, you can search an unfinished command using `'ps'` command and stop it by `'kill'`. (This action may be required when `Ctrl + c` does not work.)
- If something wrong with the cursor, then
  - `Ctrl + j`.

# How to start your job?

- Many programs are packaged and stored in a compressed file. You will perform un-compression.

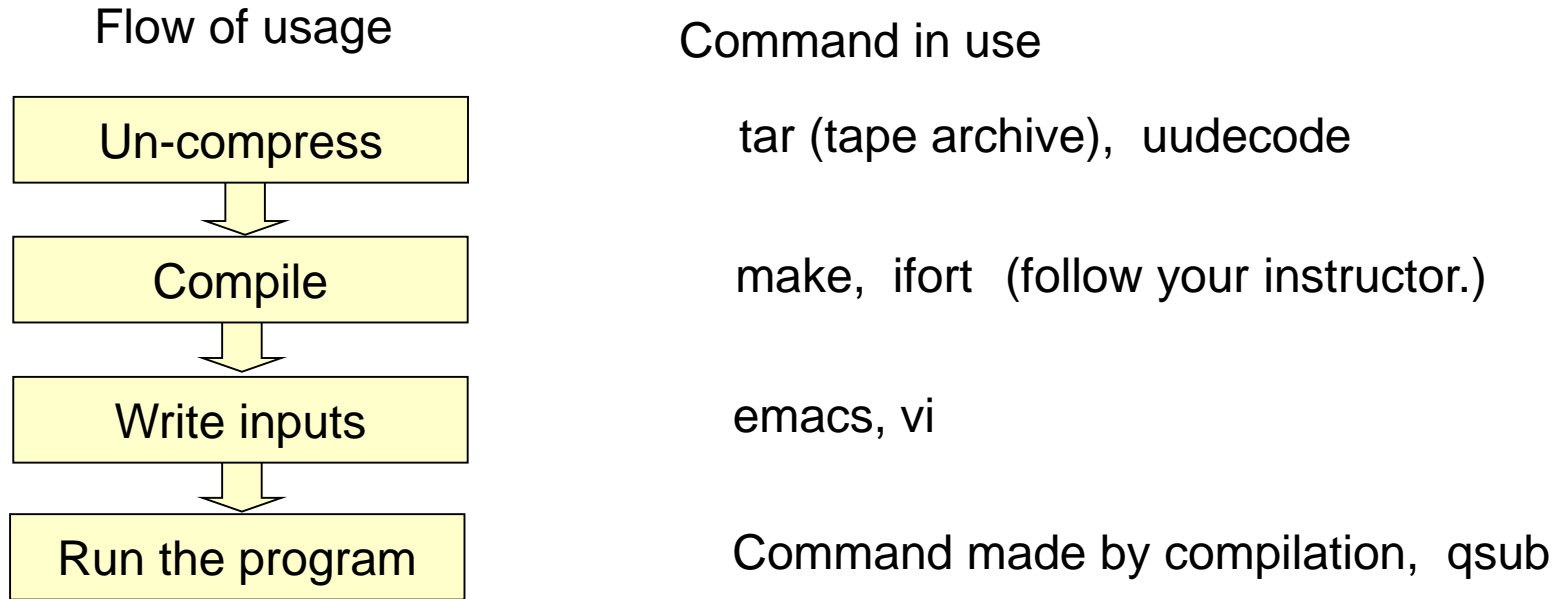

- Un-compression of a tar-archived file would be,


```
[stud01@cmd ~]$ tar xvf CMD-test.tar
```

```
[stud01@cmd ~]$ tar zxvf CMD-test.tgz
```

↖ For zip file

# Edit a file by “gedit” !

- If this is the first time, we recommend you to edit a file by “gedit”.

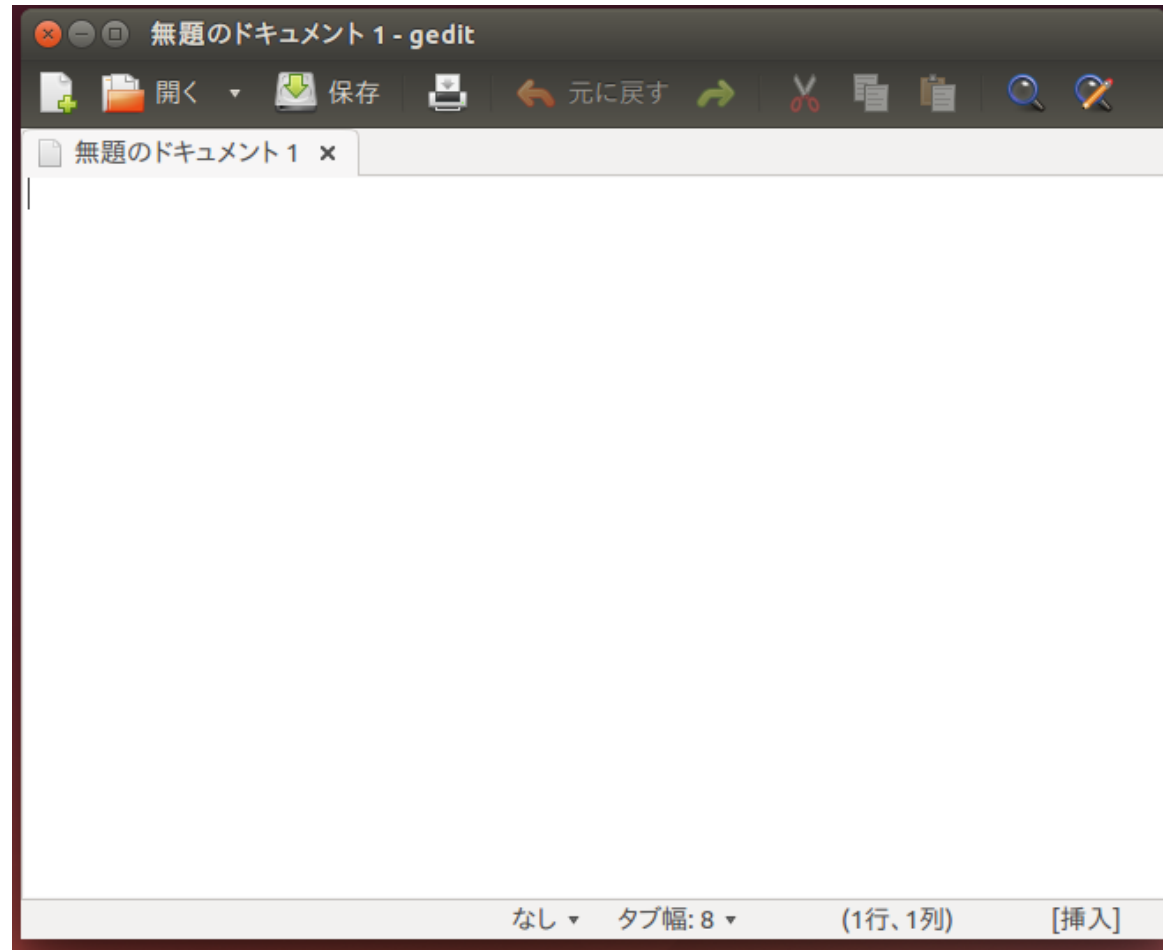


# How to use gedit

Put your cursor on the head line, then you will find the menu bar.

テキストファイル(F) 編集(E) 表示(V) 検索(S) ツール(T) ドキュメント(D) ヘルプ(H)



Key words in “a fortran source file” are highlighted.

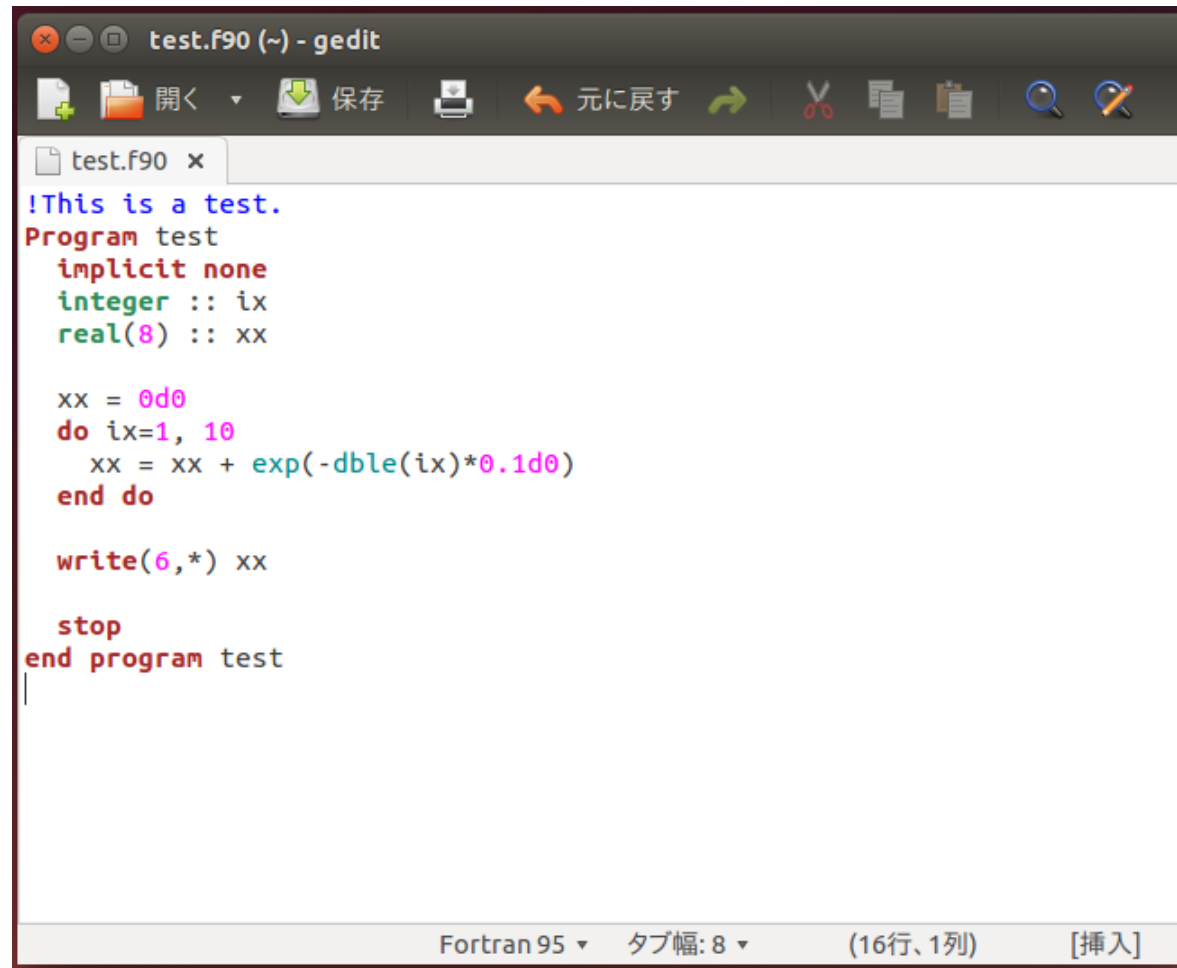

```
test.f90 (~) - gedit
開く 保存 元に戻す
!This is a test.
Program test
  implicit none
  integer :: ix
  real(8) :: xx


  xx = 0d0
  do ix=1, 10
    xx = xx + exp(-dble(ix))*0.1d0
  end do

  write(6,*) xx

  stop
end program test

Fortran 95  タブ幅: 8  (16行、1列)  [挿入]
```

# gedit on GNOME environment

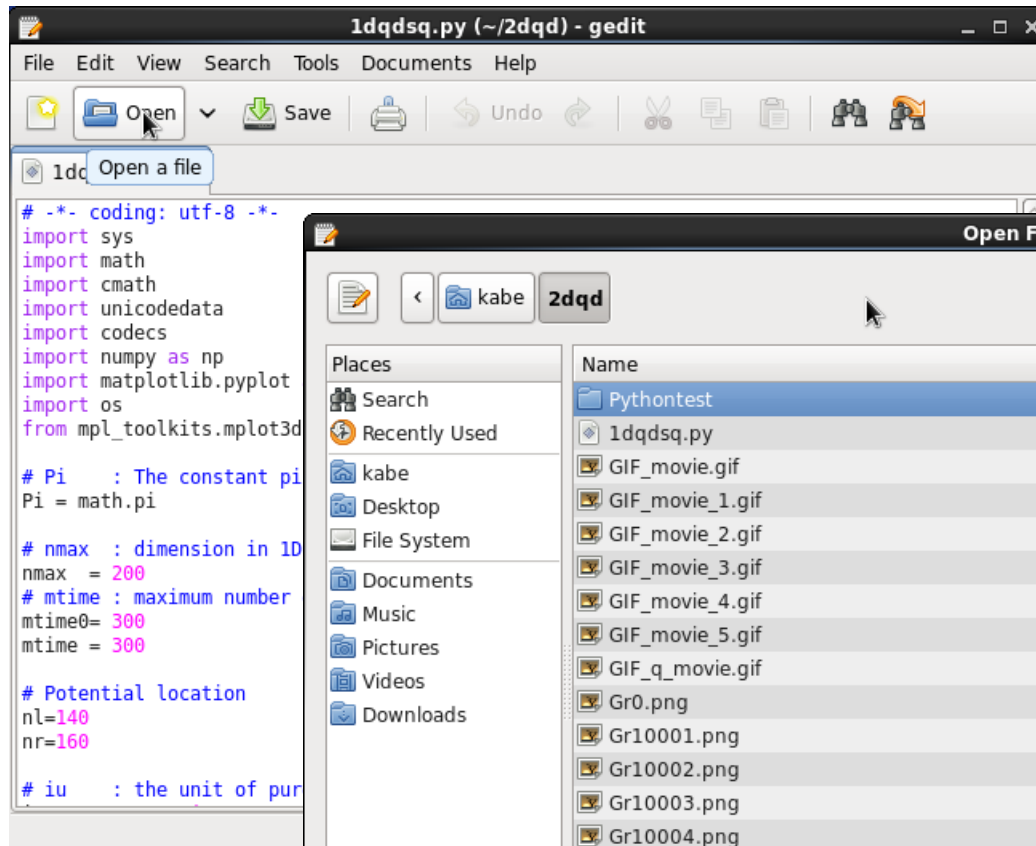

```
1dqdsq.py (~/.2dqd) - gedit
File Edit View Search Tools Documents Help
Open Save Undo
1dq Open a file
# -*- coding: utf-8 -*-
import sys
import math
import cmath
import unicodedata
import codecs
import numpy as np
import matplotlib.pyplot
import os
from mpl_toolkits.mplot3d


# Pi : The constant pi
Pi = math.pi

# nmax : dimension in 1D
nmax = 200
# mtime : maximum number
mtime0= 300
mtime = 300


# Potential location
nl=140
nr=160

# iu : the unit of pur
```


When you push “Open”, a window appears to select a file for edit.

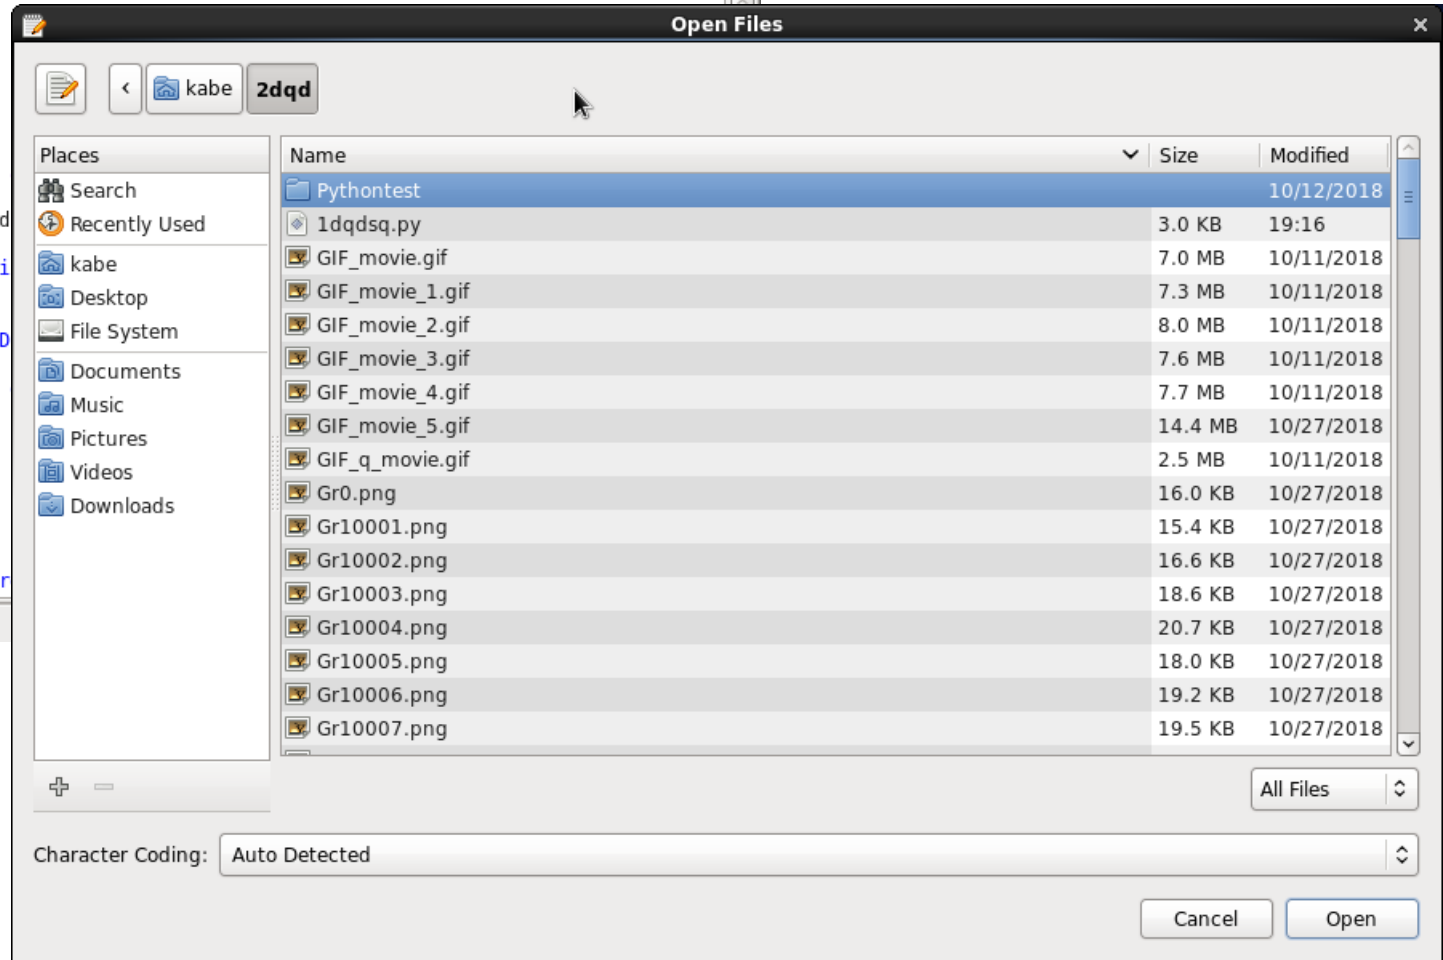

# Save, Find, etc. in gedit

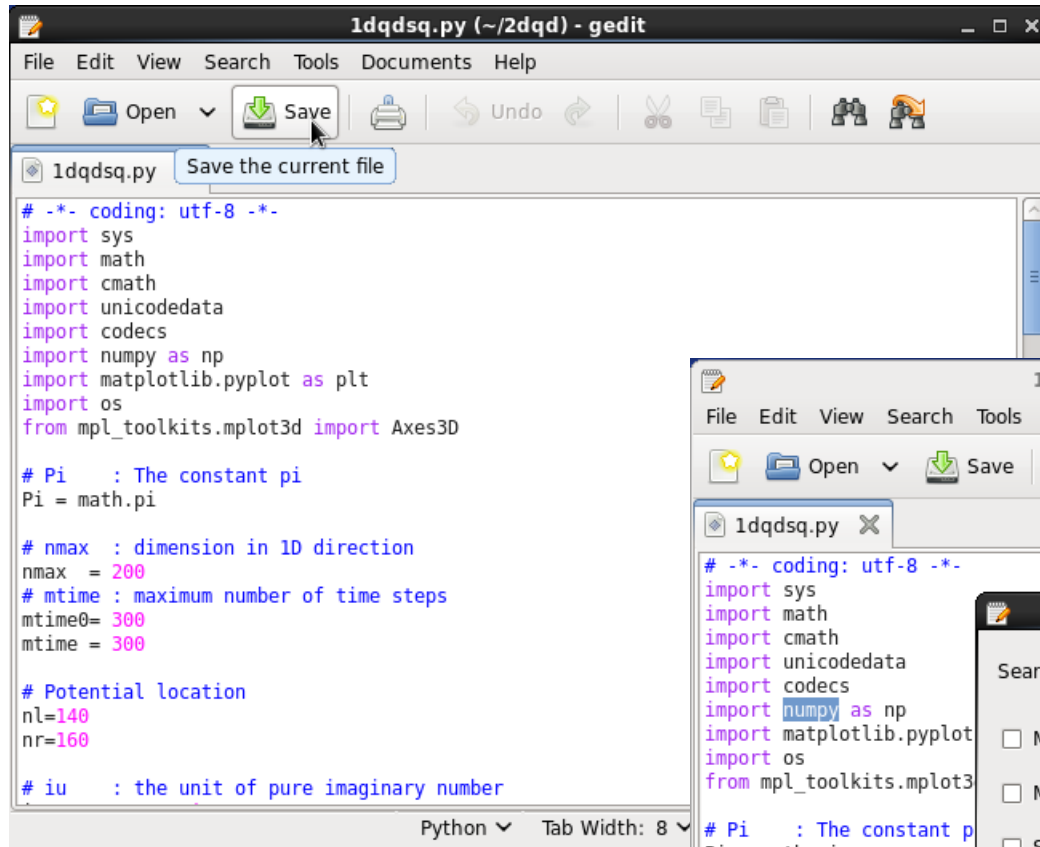

You can start "Find" by pushing binoculars.

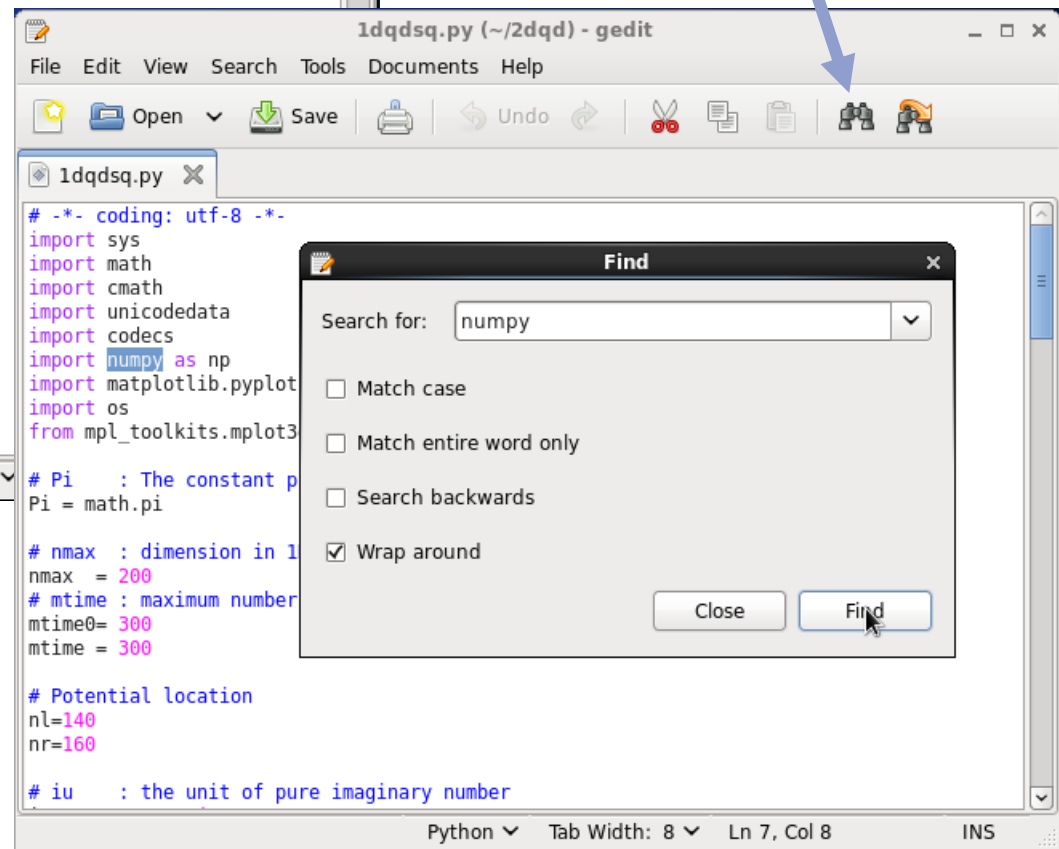

You can save the buffer contents to the file.



# How to use Emacs (basics)

- Let's start Emacs up with new Window.

```
[stud01@cmd ~]$ emacs &  
Don't you find?
```

- In the first page, message to introduce Emacs is given.

- You can start editing a file by typing `Ctrl + x Ctrl + f`.

Please insert a file name at  
Find file : ~/


/ represents the home directory.

which is shown in a lower sub-window.

- You may edit test.txt by

```
[stud01@cmd CMD-test]$ emacs test.txt &
```

which allows you to start Emacs up with the file shown.

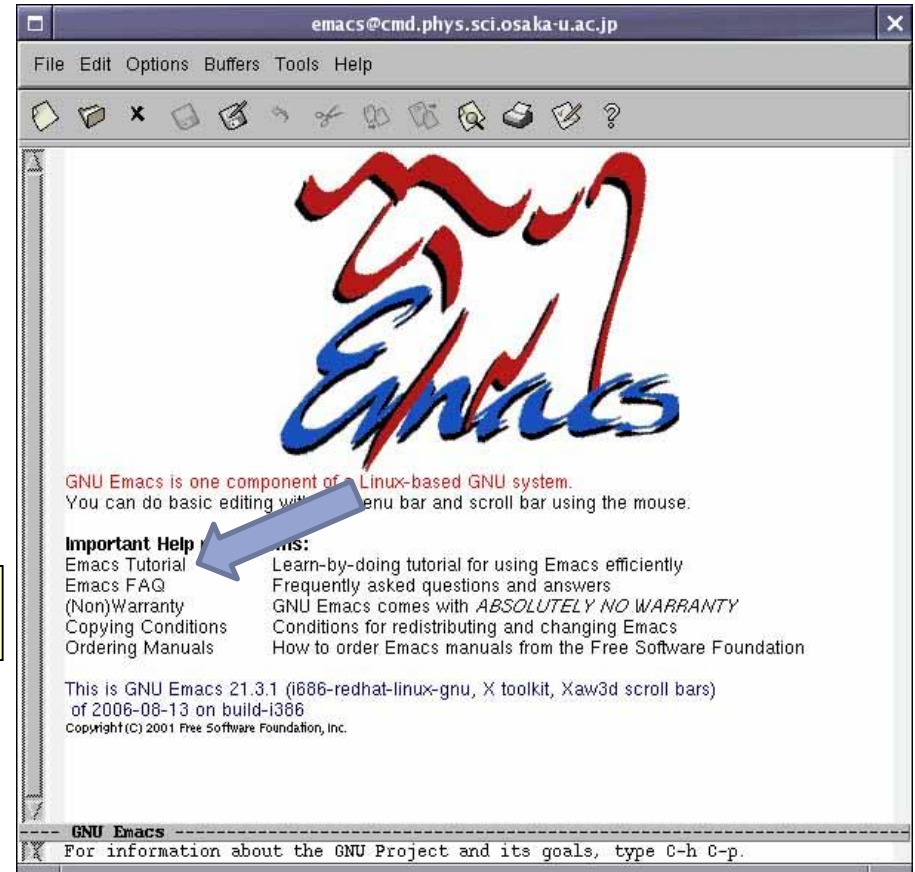

Name of the target file.

# Emacs keystroke I : Ctrl + “1 character”

Key	command action	Key	command action
C+@	set-mark-command	C+o	open-line
C+a	move-beginning-of-line	C+p	previous-line
C+b	backward-char	C+q	quoted-insert
C+c	mode-specific-command-prefix	C+r	insearch-backward
C+d	delete-char	C+s	isearch-forward
C+e	move-end-of-line	C+t	transpose-chars
C+f	forward-char	C+u	universal-argument
C+g	keyboard-quit	C+v	scroll-up
C+h	help-command	C+w	kill-region
C+i	indent-for-tab-command	C+x	Control-X-prefix
C+j	newline-and-indent	C+y	yank
C+k	kill-line	C+z	iconify-or-deiconify-frame
C+l	recenter-top-bottom	C+_	undo
C+m	newline-and-indent	C+SPC	set-mark-command
C+n	next-line	C+/	undo

# Emacs keystroke II : Esc + “1 character”

Key	command action
Esc+a	backward-sentence
Esc+b	backward-word
Esc+c	capitalize-word
Esc+d	kill-word
Esc+e	forward-sentence
Esc+f	forward-word
Esc+g	prefix command
Esc+h	mark-paragraph
Esc+i	tab-to-tab-stop
Esc+j	indent-new-comment-line
Esc+k	kill-sentence
Esc+l	downcase-word

Key	command action
Esc+m	back-to-indentation
Esc+o	face-menys-keymap
Esc+q	fill-paragraph
Esc+r	move-to-window-line
Esc+t	transpose-words
Esc+u	upcase-word
Esc+v	scroll-down
Esc+w	kill-ring-save
Esc+x	execute-extended-command
Esc+y	yank-pop
Esc+z	zap-to-char

In addition, we have

Esc	,	>	move to the end of buffer
Esc	,	<	move to the top of buffer

# Emacs keystroke III : Ctrl + “2 strokes”




Key	command action
C+x C+b	list-buffers
C+x C+c	save-buffers-kill-emacs
C+x C+e	eval-last-sexp
C+x C+f	find-file
C+x TAB	indent-rigidly
C+x C+r	find-file-read-only
C+x C+s	save-buffer
C+x C+w	write-file
C+x 0	delete-window
C+x 1	delete-other-windows
C+x 2	split-window-vertically
C+x 3	split-window-horizontally

Key	command action
C+x b	switch-to-buffer
C+x d	dired
C+x i	insert-file
C+x k	kill-buffer
C+x o	other-window
C+x u	advertised-undo
C+x z	repeat

- You can do copy or cut&paste using your mouse.
- Command may be called in the GUI menu line.
- To make completion, please type Tab, in a middle of writing a word.
- > may be Shift + ..

# Modes of vi & some commands

Let's do start vi up by `[stud01@cmd ~]$ vi newtest.txt`

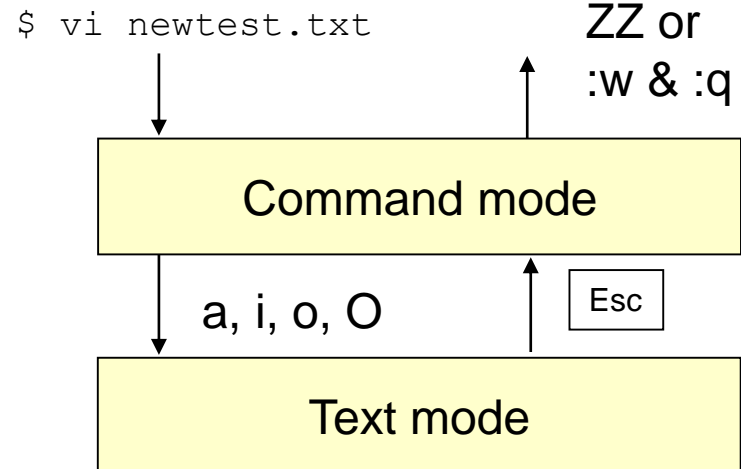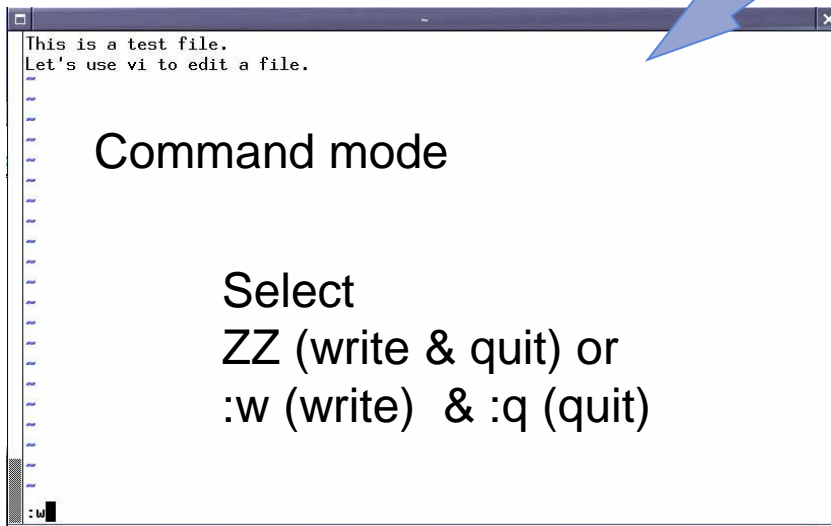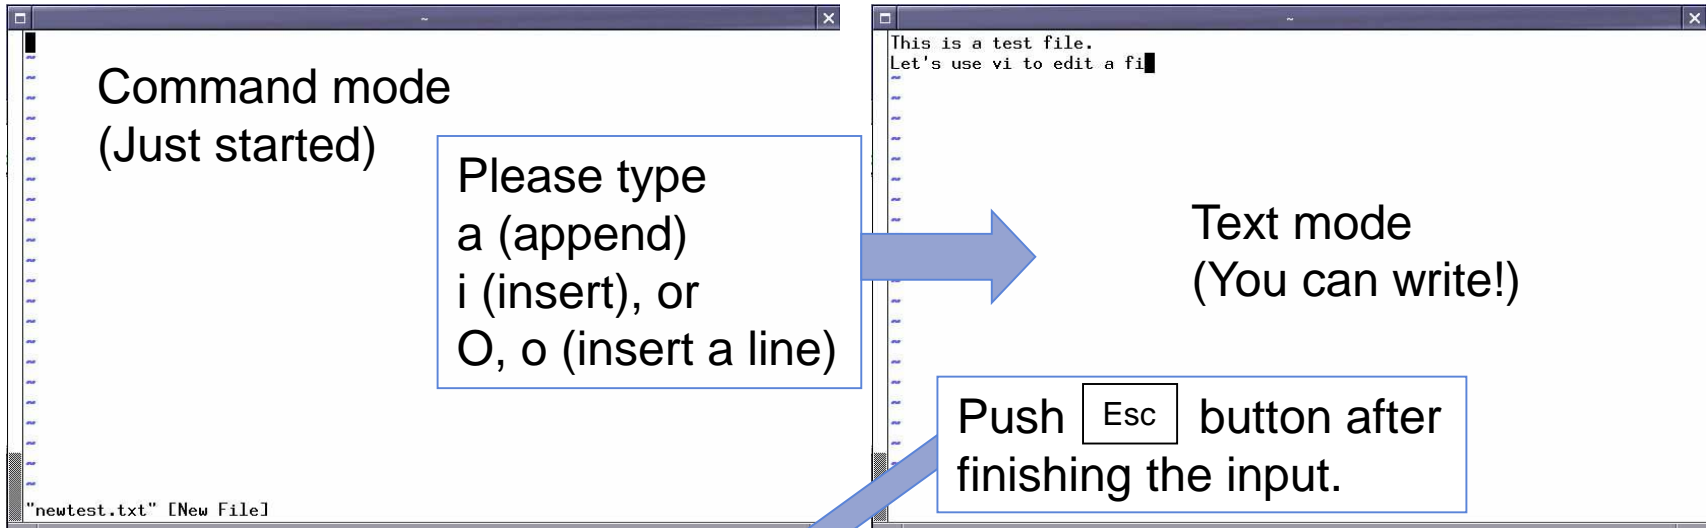

## If you have a trouble in vi

- Undo a command just done :  
In the command mode (If you are in text mode, type `Esc` and then) push 'u' (undo).
- Re-fresh the screen :  
Push `Ctrl + I` in the command mode.
- If you did some unwished operations :  
Type '1P' in the command mode.
- If you cannot find a way by doing some solutions above, please consult instructors (teachers & tutors).

# Example of “less .bashrc”

- Let's look at contents of a file. Check file lists by “ls -laF.”  
-rw-r--r-- 1 stud01 cmd 124 Feb 15 19.34 .bashrc  
...
- You can use “cat” to see the contents.  
[stud01@cmd ~]\$ cat .bashrc
- You can use “less” command to see the contents of a file.  
[stud01@cmd ~]\$ less .bashrc
- Type “q” to end the less command, after checking the contents.

```
# .bashrc
```

```
# User specific aliases and functions
```

```
# Source global definitions
```

```
if [ -f /etc/bashrc ]; then
```

```
    . /etc/bashrc
```

```
fi
```

```
.bashrc (END)
```

Please use “man” command to find why people use “less.”

```
[stud01@cmd ~]$ man less
```

```
[stud01@cmd ~]$ man more
```

Which would you like “more” or “less”?

Please enjoy your unix life!

Thanks a lot.  
K. Kusakabe